


LIGHTING DESIGN-THIRD FLOOR PLAN -  
ALTERNATE  
② 1/8" = 1'-0"

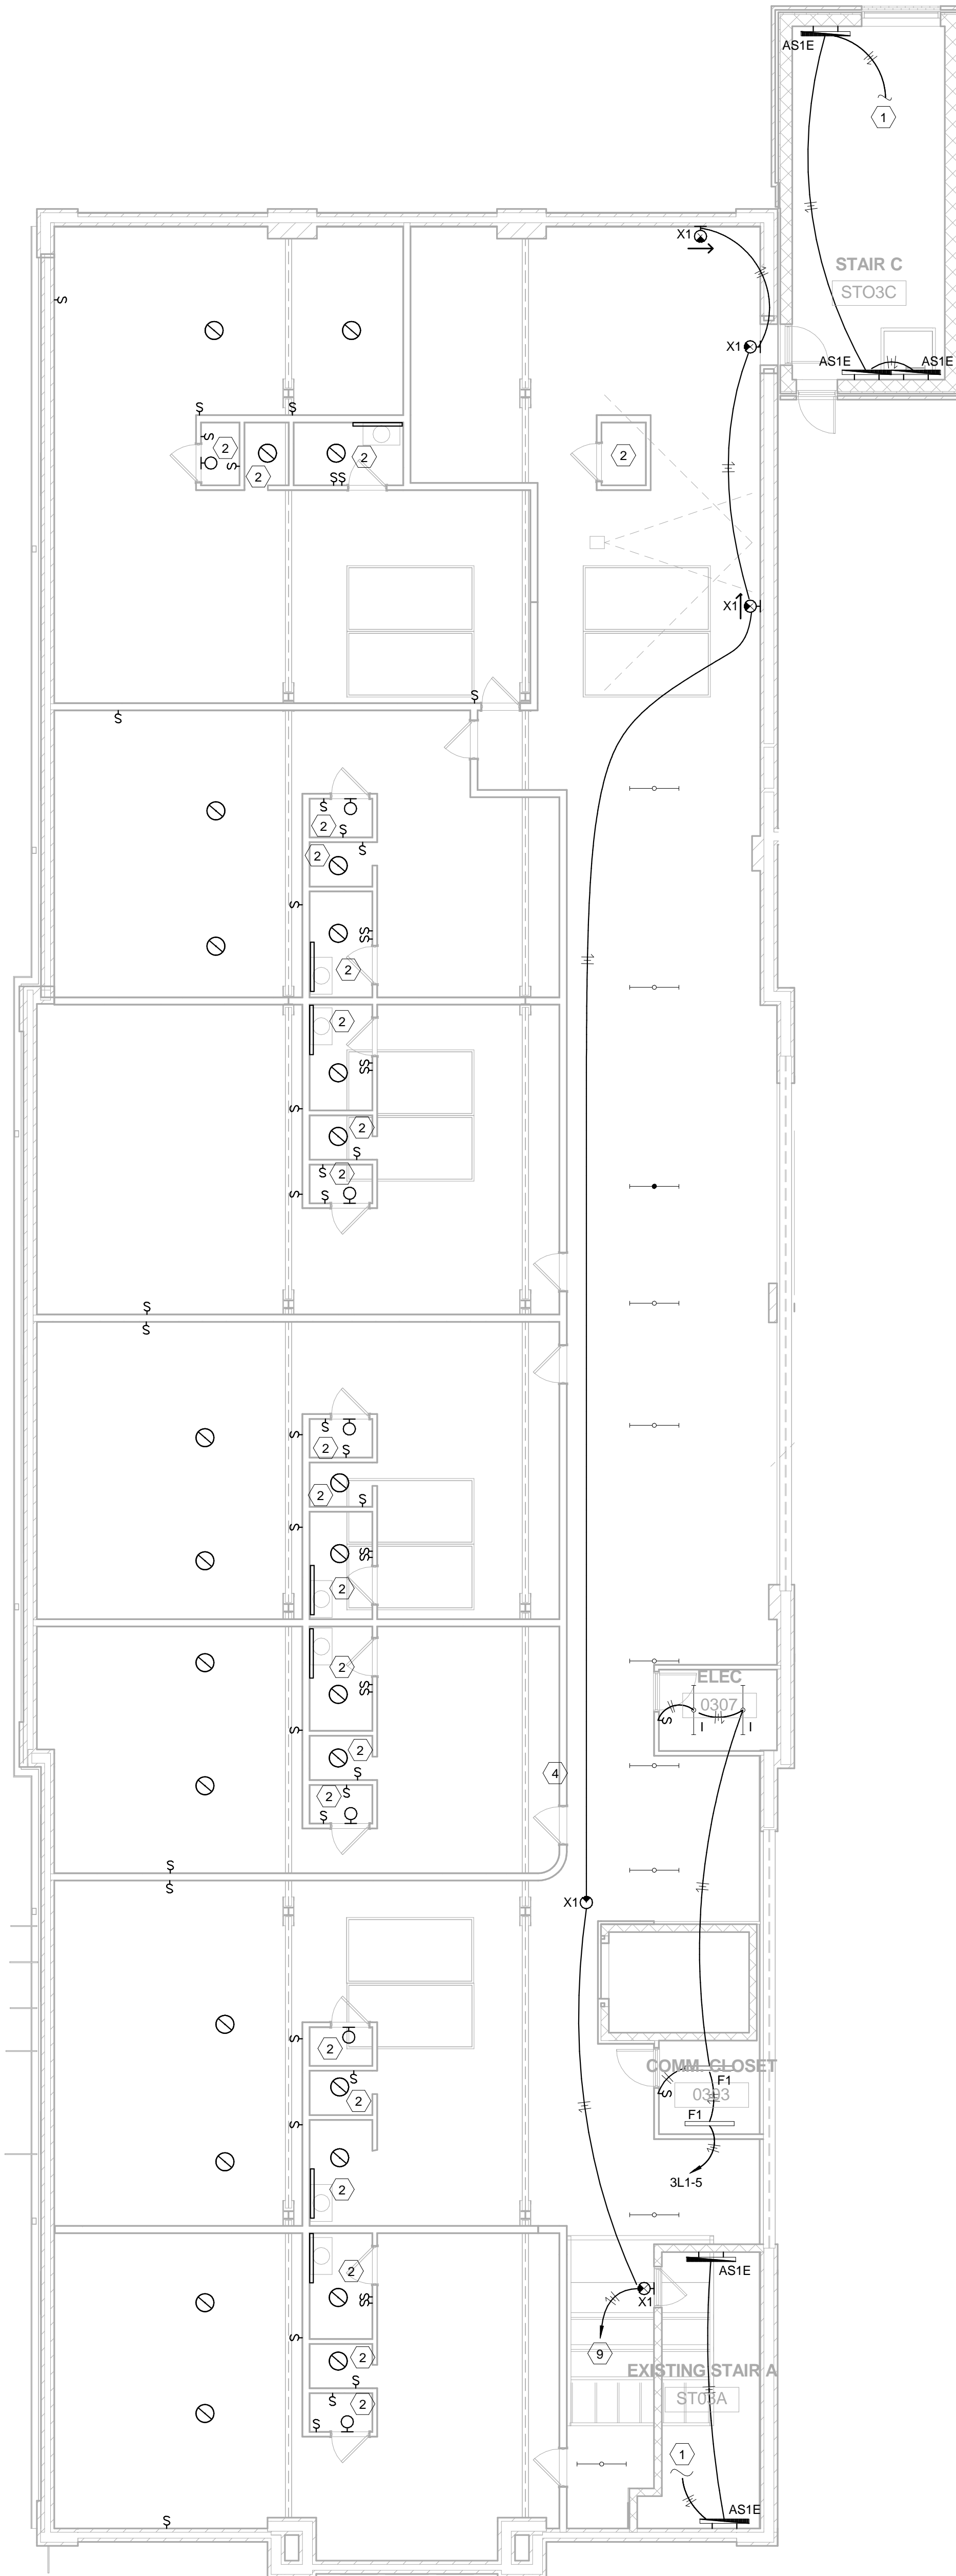

LIGHTING DESIGN-THIRD FLOOR PLAN -  
BASE BID  
① 1/8" = 1'-0"

LIGHTING DESIGN GENERAL NOTES

- A. CONTRACTOR IS PERMITTED TO USE 1/2" CONDUIT FOR LIGHT FIXTURES IN EXPOSED CEILING TO MINIMIZE APPEARANCE OF CONDUIT RUNS.
- B. ALL CONDUIT, RACEWAY, AND JUNCTION BOXES IN EXPOSED CEILING IS TO BE PAINTED TO MATCH STRUCTURE.
- C. CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF EXPOSED CONDUIT TO MINIMIZE APPEARANCE AND IN AN EXCELLENT WORKMAN LIKE APPEARANCE. EXPOSED CONDUIT SHALL BE INSTALLED WITH RUNS IN PARALLEL OR PERPENDICULAR TO WALLS, STRUCTURAL MEMBERS, OR INTERSECTIONS OF VERTICAL PLANES AND CEILING. ALL RIGHT TURNS TO HAVE METAL FITTINGS OR SYMMETRICAL BENDS UNLESS APPROVED IN WRITING BY ARCHITECT.
- D. FIXTURES TAGGED AS "NL" (NIGHT-LIGHT) ARE TO REMAIN ILLUMINATED AND UNSWITCHED VIA LOCAL CONTROLS.
- E. ALL OCCUPANCY SENSORS TO HAVE DUAL SIGNAL OUTPUTS. ONE FOR LIGHTING CONTROL. ONE FOR HVAC CONTROL.
- F. ALL CEILING MOUNTED DEVICES IN BASEMENT TO BE REMOVED (ALTERNATE AND BASE BID). BASEMENT LIGHTING IS TO BE REINSTALLED IN NEW CEILING AT EXISTING LOCATION (BASE BID).

LIGHTING DESIGN THIRD FLOOR PLAN TAGGED NOTES (X)

- 1. CIRCUIT TO STAIRWELL LIGHTING FIXTURES BELOW.
- 2. EXISTING ROOM WITH EXISTING LIGHT FIXTURES AND LIGHT CONTROLS TO REMAIN.
- 3. CIRCUIT LIGHTS TO EXISTING LOCAL PANEL. PROVIDE 20 AMP SINGLE POLE BREAKER AS NEEDED.
- 4. PROVIDE NEW LIGHT CONTROL SWITCH AT EXISTING LOCATION FOR NEW LIGHT FIXTURES COMPATIBLE WITH OCCUPANCY SENSOR CONTROLS.
- 5. PROVIDE NEW SWITCH AT NEW LOCATION.
- 6. CONTRACTOR IS TO PROVIDE A NETWORKED LIGHTING RELAY FOR CORRIDOR, COMMONS, AND RAMP FIXTURES. LIGHTING RELAY TO BE CONTROLLED VIA TIME SCHEDULE WITH LOCAL SWITCH OVERRIDE. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- 7. PROVIDE EMERGENCY POWER RELAY TO ALLOW FIXTURE TO BE NORMALLY CONTROLLED BUT ILLUMINATE UPON LOSS OF BUILDING POWER VIA EMERGENCY LIGHTING.
- 8. CONNECT TO CIRCUIT 3L1-5 AS SHOWN ON BASE BID.
- 9. CIRCUIT TO PANEL 1E1-35 WITH 2#12, 1#12 GROUND IN 3/4" CONDUIT TO 20A/1P BREAKER.
- 10. CONNECT TO CIRCUIT 1E1-35 AS SHOWN ON BASE BID.