


University of Louisville - Student Recreational Facility (Bid Phase #4)

Drawing Name / Description	DEMOLITION PLAN	#	Revision Date
U of L Project Number:		1	
A&E Project Number:		2	
Date:	JANUARY, 2012	3	
Drawn By:	SDS	4	
Checked By:	JLC / KLW	5	
		6	
		7	
		8	

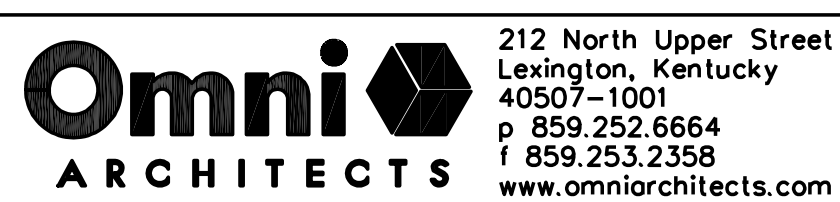

SD-3.0

FOR LOCATION OF UNDERGROUND UTILITIES CALL B.U.D. 1-502-286-6123 (2) WORKING DAYS IN ADVANCE OF DIGGING


- DEMOLITION NOTES**
- CONTRACTOR TO LOCATE ALL UNDERGROUND UTILITIES PRIOR TO DEMOLITION WORK.
 - SAWCUT PATIENT IN CLEAN STRAIGHT LINES. COORDINATE SAWCUTS WITH PROPOSED LAYOUT.
 - REFER TO LAYOUT PLAN TO ENGAGE THE EXTENT OF DEMOLITION ACTIVITIES MATCHES IMPROVEMENTS.
 - THE CONTRACTOR SHALL ESTABLISH TRAFFIC CONTROL AND SIGNING AS REQUIRED BY THE OWNER TO ALLOW STAFF AND STUDENT ACCESS TO THE BUILDING THROUGHOUT THE PROJECT PERIOD. TEMPORARY LANE CLOSURES, TEMPORARY SIGNAGE AND NIGHT BARRIERS SHALL COMPLY WITH KRODAS AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) - LATEST EDITIONS.
 - DURING CONSTRUCTION, THE WORK AREA SHALL BE KEPT CLEAR OF DEBRIS AND MUD WHICH WOULD CREATE A HAZARD TO THE FUTURE DRIVE AND WORKERS.
 - ALL DEMOLISHED MATERIALS SHALL BE REMOVED FROM THE SITE AND DEPOSITED AT A LAIRPORT OR OTHER APPROVED LOCATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING NECESSARY PERMITS TO DO SO. ALL DEMOLISHED CONCRETE AND ASPHALT SHALL BE BROPPED OF A RECYCLING FACILITY THAT WILL BE COMPLIANT WITH ALL REQUIREMENTS NECESSARY TO OBTAIN USED --- POINTS. CONTRACTOR SHALL BE RESPONSIBLE FOR TRACKING, QUANTIFYING AND RECYCLING THE RECYCLING ACTIVITIES.
 - EXISTING PAVING AND SIDEWALKS SCHEDULED TO REMAIN SHALL BE PROTECTED OR REPAIRED IF NECESSARY.
 - CONTRACTOR RESPONSIBLE FOR OBSERVATION OF SITE PRIOR TO BIDDING TO DETERMINE QUANTITY AND VALUE OF ITEMS TO BE DEMOLISHED AND REMOVED.
 - IF SHALL BE THE CONTRACTORS RESPONSIBILITY TO FULLY PROTECT ALL STRUCTURES. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRS TO DAMAGED STRUCTURES. THIS ALSO INCLUDES REPAIRS TO CITY UTILITIES. UTILITY MAINS, RAW EXHAUSTIONS TO BE ADJUSTED TO PROPOSED GRADE ELEVATIONS.
 - CONTRACTOR TO PROVIDE TEMPORARY ACCESS RAMPS/ ROUTES AS NEEDED TO SCHOOL DURING CONSTRUCTION.
 - CONTRACTOR SHALL OBTAIN AND PAY FEES FOR ALL APPLICABLE PERMITS.
 - ASPHALT PAVEMENT DAMAGED AS A RESULT OF CONSTRUCTION OPERATIONS IS TO BE REPAIRED PER THE SPECIFICATIONS.
 - ALL CONSTRUCTION AND MATERIALS INSTALLED WITHIN THE RIGHT-OF-WAY SHALL CONFORM TO LUDAS STANDARDS.
 - CONTRACTOR SHALL PROVIDE TEMP. 8' HT. CHAIN-LINK FENCING AS INDICATED, TO KEEP THE PUBLIC OUT OF THE CONSTRUCTION LIMITS AT EACH PHASE OF THE PROJECT.

CODED DEMOLITION NOTES

KEY	DESCRIPTION
1	TEMPORARY PHASE 2 CONSTRUCTION FENCE AND GATES WHERE INDICATED ON THIS CONSTRUCTION PLAN.
2	EXISTING CONCRETE PAVEMENT/SEE INDICATED ON THIS CONSTRUCTION PLAN. CONTRACTOR TO REMOVE CURB AND EXISTING CONCRETE PAVEMENT/SEE INDICATED ON THIS CONSTRUCTION PLAN. CONTRACTOR TO REMOVE CURB AND EXISTING CONCRETE PAVEMENT/SEE INDICATED ON THIS CONSTRUCTION PLAN. CONTRACTOR TO REMOVE CURB AND EXISTING CONCRETE PAVEMENT/SEE INDICATED ON THIS CONSTRUCTION PLAN.
3	REMOVE EXISTING ASPHALT AND STONE ADJACENT TO A FACILITY IN WHICH LEAD OR OTHER TOXIC MATERIALS ARE KNOWN TO BE PRESENT. CONTRACTOR TO REMOVE EXISTING ASPHALT AND STONE ADJACENT TO A FACILITY IN WHICH LEAD OR OTHER TOXIC MATERIALS ARE KNOWN TO BE PRESENT.
4	REMOVE EXISTING ASPHALT AND STONE ADJACENT TO A FACILITY IN WHICH LEAD OR OTHER TOXIC MATERIALS ARE KNOWN TO BE PRESENT.
5	REMOVE EXISTING TREE/SHRUB INCLUDING STUMP.
6	SAWCUT AND REMOVE STUMP/SUBSTRY PER IN ACCORDANCE WITH PROPOSED IMPROVEMENTS.
7	SAWCUT AND REMOVE PORTION OF DUMPSITER WALL ENCLOSURE AS INDICATED FOR COMPLIANCE WITH PROPOSED IMPROVEMENTS.
8	REMOVE STORM STRUCTURE.
9	SAWCUT, BEAM/END DEMOLITIONS.
10	ROLLOD TO BE REMOVED.
11	ROLLOD TO REMAIN AND BE PROTECTED HARD IMPROVEMENT ACTIVITIES.
12	EXISTING CHAIN LINK FENCE TO REMAIN.
13	REMOVE CURB SAWCUT WHERE APPLICABLE.
14	TEMPORARY FENCE AND GATE TO BE PLACED BETWEEN 6/01/13 AND 7/01/13 DURING CONSTRUCTION OF THE SIDEWALK AREA. FENCE TO BE REMOVED BY 7/01/13 OR AS APPROVED BY OWNER.
15	EXISTING BENT RACK CONCRETE PAD LOCATED AT SOUTHWEST CORNER OF MUSEUM HALL SHALL BE SAWCUT AS NECESSARY TO ACCOMMODATE PROPOSED IMPROVEMENTS.
16	EXISTING STORM STRUCTURE SHALL REMOVE A CONC. COLLAR TO MEET AND MATCH PROPOSED GRADES.
17	SAWCUT AND REMOVE ASPHALT PAVEMENT WITHIN PERMITTED CROSSWALK AS NECESSARY TO ACCOMMODATE IMPROVEMENTS. CONTRACTOR TO REMOVE ASPHALT PAVEMENT WITHIN PERMITTED CROSSWALK AS NECESSARY TO ACCOMMODATE IMPROVEMENTS. CONTRACTOR TO REMOVE ASPHALT PAVEMENT WITHIN PERMITTED CROSSWALK AS NECESSARY TO ACCOMMODATE IMPROVEMENTS. CONTRACTOR TO REMOVE ASPHALT PAVEMENT WITHIN PERMITTED CROSSWALK AS NECESSARY TO ACCOMMODATE IMPROVEMENTS.
18	BID PACKAGE #1 TEMPORARY FENCE LOCATION TO BE RELOCATED AS INDICATED (NOTE #1).
19	EXISTING ASPHALT TO BE MILLED AND PREPARED FOR ASPHALT OVERLAY.
20	TEMPORARY SIGN (SEE ADDENDUM) WHICH SHALL BE: SIDEWALK CLOSED AHEAD.
21	FENCING AND GATES TO BE INSTALLED PRIOR TO CONSTRUCTION. FENCING AND GATES SHALL BE REMOVED AND TAKEN TO LOCATION ON THE PROPERTY OF THE OWNER. THE FENCING SHALL BECOME THE PROPERTY OF THE OWNER.

ADDENDUM #2, ITEM #5
DATED 3-02-2012

NOTE:
TEMPORARY CONSTRUCTION FENCING USED FOR BID PACKAGE #1 SHALL BE MOVED AS REQUIRED AND RE-USED IN LOCATIONS INDICATED. ADDITIONAL FENCING AND GATES WILL BE PURCHASED BY THE CONTRACTOR. PLACED AS INDICATED. MAINTAINED BY THE CONTRACTOR. REMOVED AT THE END OF THE PROJECT AND MOVED TO A LOCATION REQUIRED BY THE OWNER. FENCE/GATES WILL BECOME THE PROPERTY OF THE OWNER.

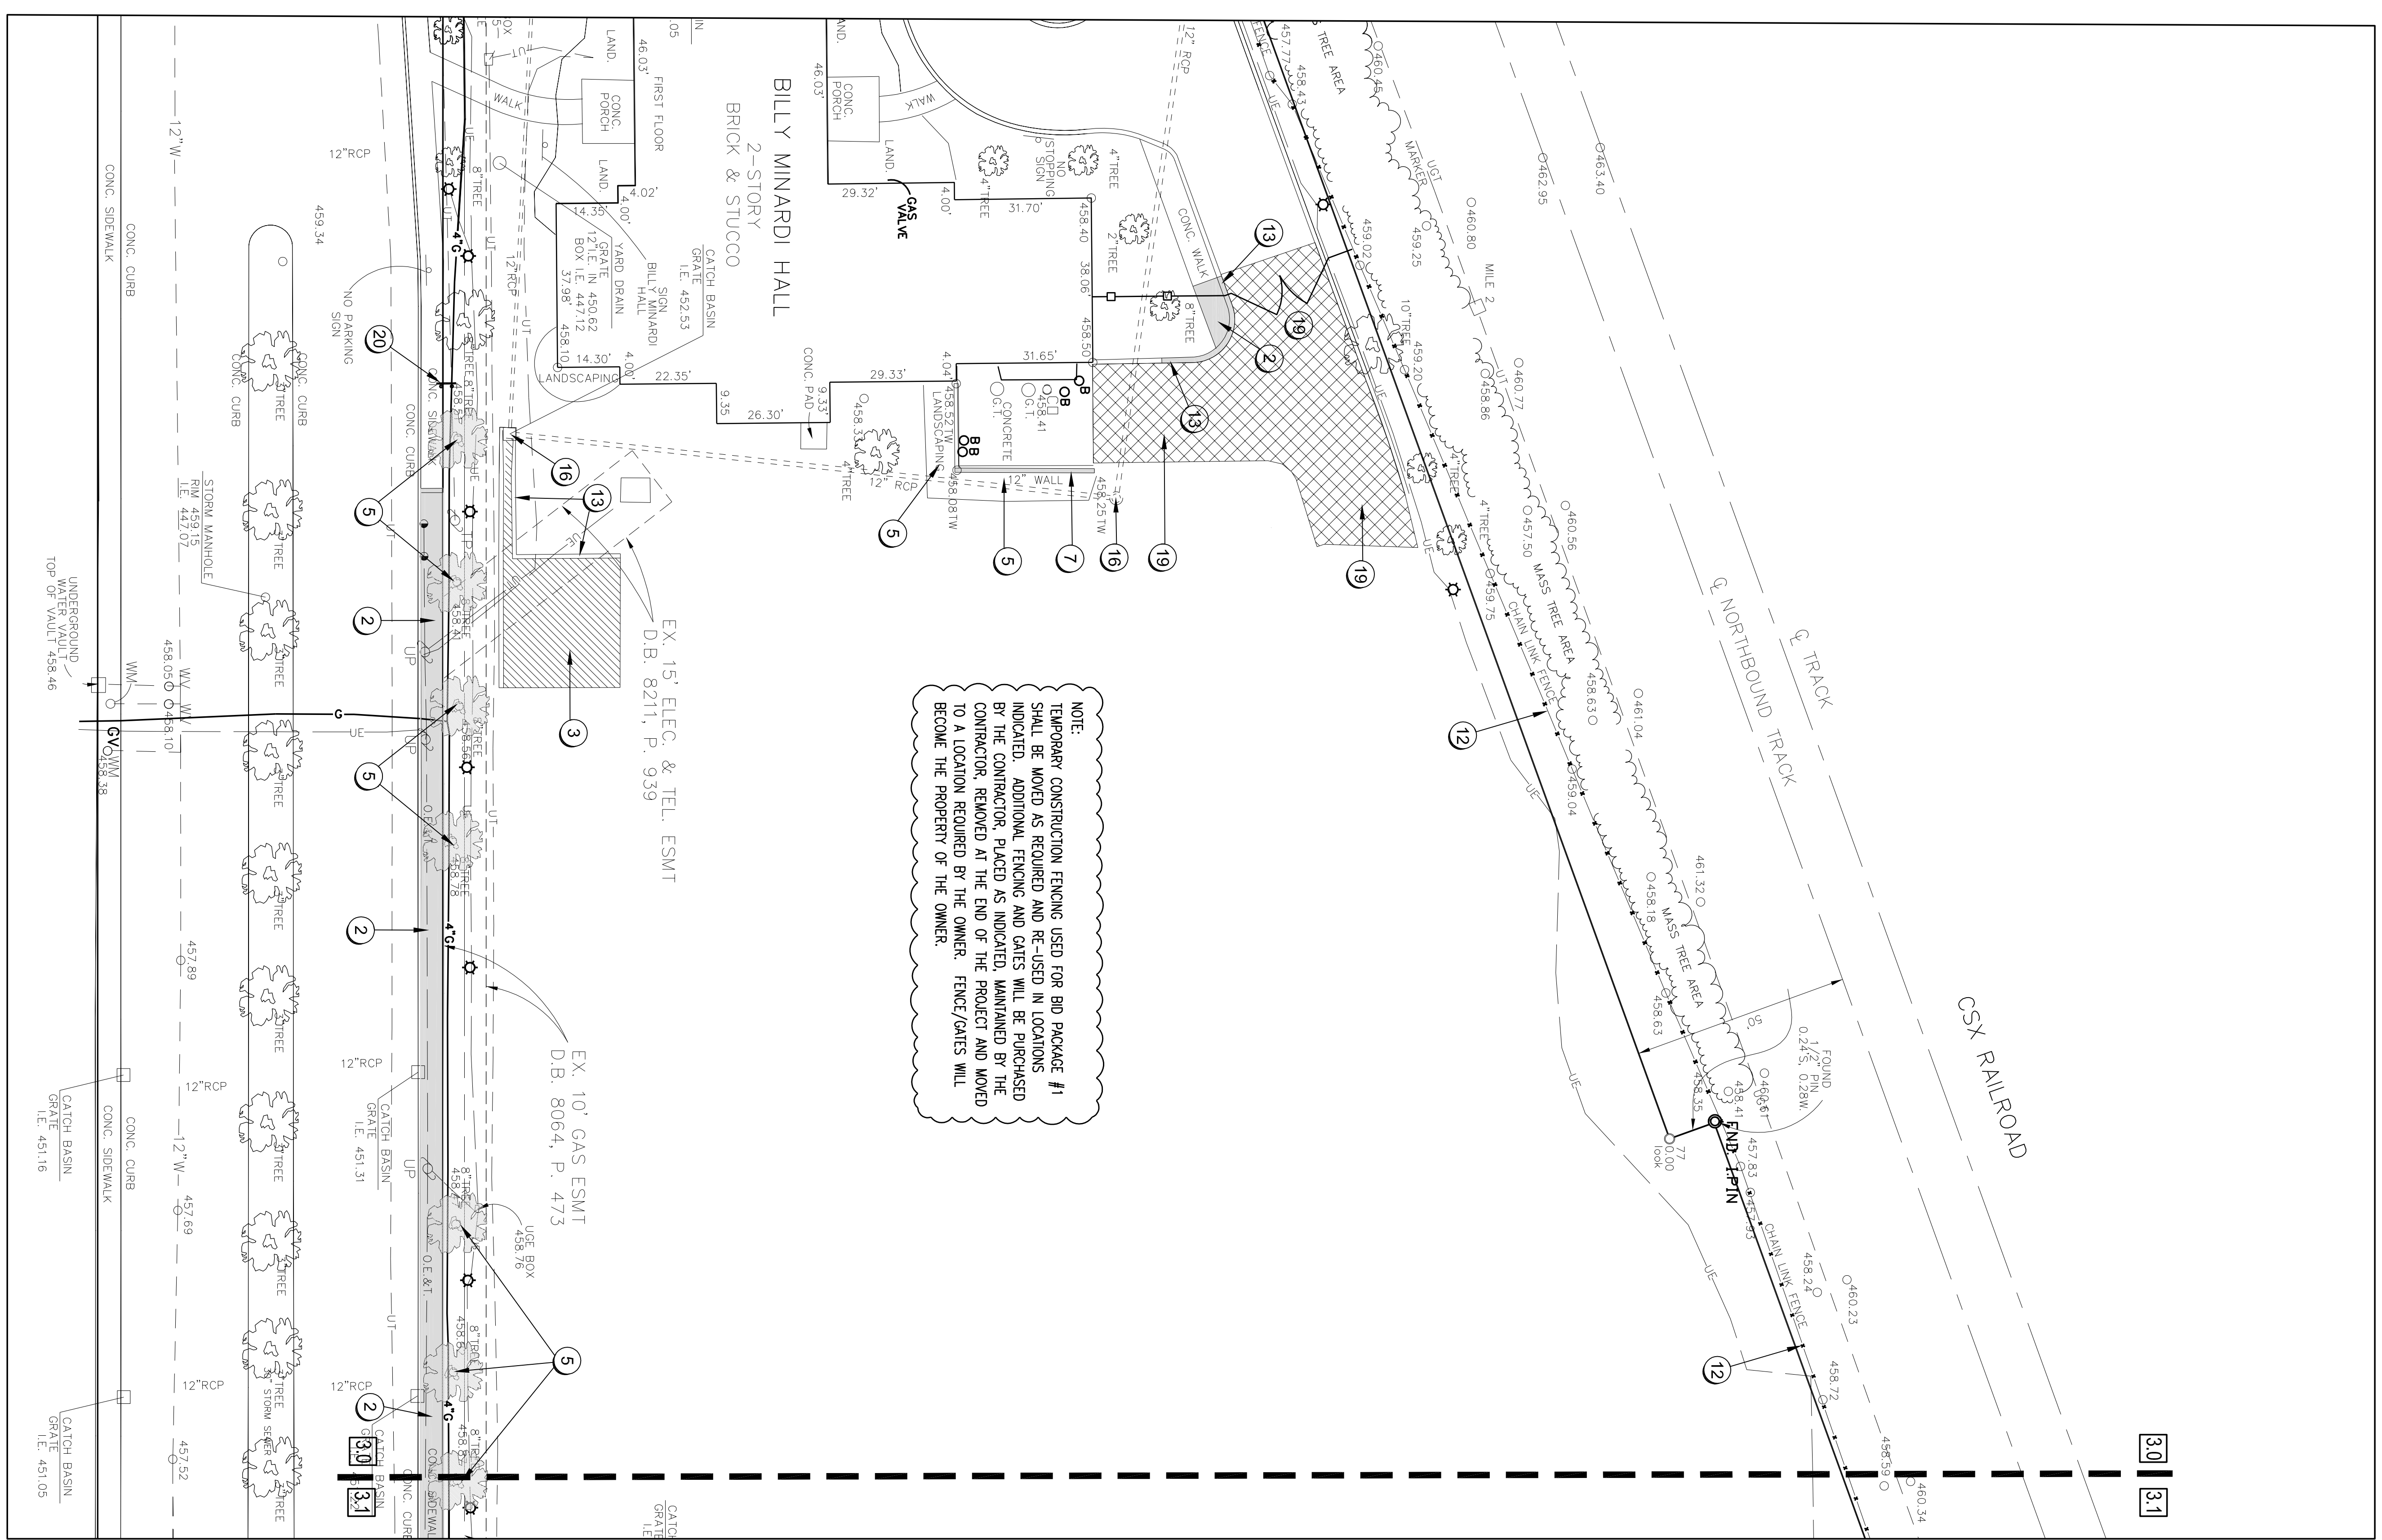

DEMOLITION PLAN: PHASE 2
SCALE: 1"=20'-0"

