

LOUISVILLE & NASHVILLE R.R. R/W

THEATER BUILDING

WARNOCK STREET 60' R/W

FLOYD STREET 60' R/W

FF Elev. 459.00

Perimeter Security Fence (Typ.)

PARKING GARAGE

Ex. Sewer & Drain, Easmt. (Variable) D.B. 6366 Pg. 418

Ex. Sewer & Drain, Easmt. (Variable) D.B. 6366 Pg. 419

LEGEND (WITH MSD STD. DWG. NO.)

- STONE BAG INLET PROTECTION EF-03-01
- ▣ STONE BAG CHECK DAM IN SMALL DITCH EF-12-01
- ▭ STABILIZED CONSTRUCTION ENTRANCE ER-01-01
- SILT FENCE EF-09-01

MAINTENANCE AND CLEANING:

Contractor shall follow the inspection and maintenance requirements described in MSD's Standard Specifications in Section 2.3.3, Sediment Control and the standard drawings.

EROSION PREVENTION AND SEDIMENT CONTROL NOTES:

The approved erosion prevention and sediment control (EPSC) plan shall be implemented prior to any land-disturbing activity on the construction site. Any modifications to the approved EPSC plan must be reviewed and approved by MSD's Private Development Review office. EPSC BMP's shall be installed per the plan and MSD Standards.

Detention basins, if applicable, shall be constructed first and shall perform as sediment basins during construction until the contributing drainage areas are seeded and stabilized.

Actions must be taken to minimize the tracking of mud and soil from construction areas onto public roadways. Soil tracked onto the roadway shall be removed daily.


Soil stockpiles shall be located away from streams, ponds, swales and catch basins. Stockpiles shall be seeded, mulched, and adequately contained through the use of silt fence.

All stream crossings must utilize low-water crossing structures per MSD Standard Drawing ER-02.

Sediment-laden groundwater encountered during trenching, boring or other excavation activities shall be pumped to a sediment trapping device prior to being discharged into a stream, pond, swale or catchbasin.

Where construction or land disturbing activity will or has temporarily ceased on any portion of a site, temporary site stabilization measures shall be required as soon as practicable, but no later than 14 calendar days after the activity has ceased.

NO.	REVISED	DATE

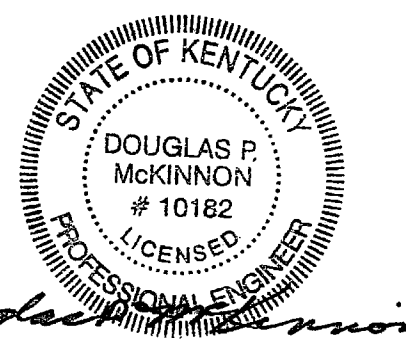


CERTIFICATION
CONSTRUCTION DOCUMENTS

CARDINAL PARK NATATORIUM

UNIVERSITY OF LOUISVILLE

Project: 03008
Drawn: BDH
Checked: DPM
Scale: 1"=40'
Issue Date: AUGUST 27, 2003
Revision:



EROSION PREVENTION & SEDIMENT CONTROL PLAN
C5.00 OFFICIAL BID DOCUMENT