

GENERAL NOTES:
 1. SEE BUILDING ELEVATIONS FOR LOCATIONS OF BLACK FRAMES AND TINTED GLAZING.
 2. PROVIDE SAFETY GLASS WHERE REQUIRED BY THE KENTUCKY BUILDING CODE (TEMPERED, LAMINATED, WIRE).


RECORD DOCUMENTS
 These Record Documents have been prepared based on information provided by others. The Consultant has not verified the accuracy and/or completeness of this information and shall not be responsible for any errors or omissions that may be incorporated as a result of erroneous information provided by others.

Omni ARCHITECTS 12/1/02 DATE

DOOR DETAILS A-8.7

REVISIONS		DATE	NORTHERN KENTUCKY UNIVERSITY	
1			PHASE B	
2			NATURAL SCIENCE BUILDING	
3			DRAWINGS N°	
4			A-8.7	
5			REVIEWED	
6			DIV. OF ENGR.	
7			ENGR. FILE N°	
8			I-111	
9				

1	STRUCTURAL CONCRETE FOUNDATION - SEE STRUCTURAL DRAWINGS FOR DIMENSIONS, BEARING POINTS AND REINFORCING.	7	EXPOSED CAST-IN-PLACE CONCRETE WITH ARCHITECTURAL FINISH AND RUSTICATION JOINTS	14	STEEL EDGE ANGLE - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	21	METAL HANDRAIL / GUARDRAIL WITH COMPOSITE ALUMINUM PANEL FINISH TO MATCH PAINTED FINISH	28	BACKER ROD AND SEALANT IN CONCRETE JOINTS IN THIS LOCATION ONLY	35	EXTRUDED ALUMINUM COPING WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	42	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH BLACK FLUOROPOLYMER FINISH	49	1" INSULATING CLEAR GLAZING WITH LOW-E/EMISSIVITY COATING	56	WALL BASE - SEE SCHEDULE FOR TYPE	63	COMPOSITE DRAINAGE / PROTECTION BOARD WITH INTEGRAL FILTER FABRIC OVER RUBBERIZED ASPHALT WATERPROOFING MEMBRANE - PROVIDE FOUNDATION DRAINS AS SHOWN
2	STRUCTURAL CONCRETE SLAB - SEE STRUCTURAL DRAWINGS FOR DIMENSIONS, REINFORCING, AND ENGINEERED FILL	8	CONCRETE REVEAL FOR SURFACE-MOUNTED LIGHT FIXTURE	15	16 GAUGE COLD-FORMED METAL STUDS AT 16" ON CENTER	22	HOLLOW METAL DOOR AND FRAME WITH PAINTED FINISH	29	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	36	HOT-ASPHALT APPLIED MULTI-PLY SBS MODIFIED POLYISOCYANURATE INSULATION BOARD - INSULATION TO BE PROVIDED BY ROOFING MANUFACTURER - PROVIDE FLASHING AND SWEEP PER S.D. DO NOT CALL OR GASKET JOINTS BETWEEN PANELS	43	TRANS LUCENT COMPOSITE FIBERGLASS PANELS WITH ALUMINUM FRAME WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	50	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	57	STEEL ACOUSTIC LOUVER WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	64	1" DEEP REVEAL IN CONCRETE SURFACE
3	EXPOSED CAST-IN-PLACE CONCRETE SURFACE - DO NOT PAINT	9	CONCRETE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	16	18 GAUGE COLD-FORMED METAL FRAMING AT 16" ON CENTER	23	ADA COMPLIANT ALUMINUM THRESHOLD	30	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	37	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	44	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	54	LABORATORY CASEWORK - SEE ENLARGED PLANS AND ELEVATIONS FOR CONFIGURATION AND DIMENSIONS	61	5/8" GYPSUM BOARD OVER METAL FRAMING AT 16" ON CENTER		
4	EXPOSED CAST-IN-PLACE CONCRETE SURFACE BEYOND	10	EXPOSED STEEL STRUCTURE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	17	SECURE EACH COLD-FORMED FRAMING MEMBER TO STEEL STRUCTURE WITH SLOPED CONCRETE SURFACE	24	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	31	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	38	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	45	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	51	LIGHTWEIGHT CONCRETE TOPPING OVER STRUCTURAL METAL DECK - SLOPE AT 1/4" PER FOOT TO DRAIN AS SHOWN ON ROOF PLAN	58	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER	65	EXPOSED STEEL STAIR SYSTEM WITH PAINTED FINISH - FILL STEEL TREAD PANS WITH CONCRETE AND PROVIDE 1 1/2" DIAMETER PIPE HANDRAILS AND GUARDRAILS AT 42" ABOVE FLOOR
5	EXPOSED CAST-IN-PLACE CONCRETE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	11	STEEL STRUCTURE - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	18	APPROXIMATE FINISH GRADE - SEE SITE DRAWINGS FOR ELEVATION	25	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	32	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	39	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	46	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	52	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER	59	EXPOSED STEEL STAIR SYSTEM WITH PAINTED FINISH - FILL STEEL TREAD PANS WITH CONCRETE AND PROVIDE 1 1/2" DIAMETER PIPE HANDRAILS AND GUARDRAILS AT 42" ABOVE FLOOR	66	FLOOR FINISH - SEE ROOM FINISH SCHEDULE FOR TYPE
6	EXPOSED CAST-IN-PLACE CONCRETE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	12	EXPOSED STEEL STRUCTURE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	19	PROVIDE DOUBLE STUDS AT THIS LOCATION	26	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	33	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	40	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	47	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	53	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER	60	8" HIGH SURFACE-MOUNTED CAST ALUMINUM LETTERS / NUMBERS		
7	EXPOSED CAST-IN-PLACE CONCRETE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS	13	METAL ROOF DECK - SEE STRUCTURAL DRAWINGS FOR DEPTH AND GAUGE	20	METAL STUDS AT 16" ON CENTER	27	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	34	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	41	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	48	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	55	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
8	EXPOSED CAST-IN-PLACE CONCRETE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS			21	METAL FRAMING AT 16" ON CENTER	28	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	35	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	42	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	49	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	56	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
9	EXPOSED CAST-IN-PLACE CONCRETE WITH RITUMESCENT PAINTED FINISH - SEE STRUCTURAL DRAWINGS FOR SIZE AND DIMENSIONS			22	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	29	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	36	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	43	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	50	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	57	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				23	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	30	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	37	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	44	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	51	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	58	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				24	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	31	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	38	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	45	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	52	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	59	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				25	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	32	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	39	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	46	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	53	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	60	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				26	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	33	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	40	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	47	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	54	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	61	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				27	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	34	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	41	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	48	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	55	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	62	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				28	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	35	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	42	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	49	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	56	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	63	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				29	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	36	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	43	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	50	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	57	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	64	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				30	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	37	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	44	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	51	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	58	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	65	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				
				31	EXTERIOR ALUMINUM GUARDRAIL WITH BLACK FLUOROPOLYMER FINISH - 42" HIGH	38	FLUSH PANEL SOLID CORE OAK VENEER DOOR - SEE DOOR SCHEDULE FOR SIZE	45	EXTRUDED ALUMINUM PASSENGER EDGE WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	52	5/8" GYPSUM BOARD OVER VAPOR BARRIER OVER RIGID INSULATION OVER 2" METAL FURRING	59	THERMALLY-BROKEN ALUMINUM STOREFRONT FRAMING SYSTEM WITH FLUOROPOLYMER FINISH TO MATCH ALUMINUM COMPOSITE PANEL COLOR	66	EXPOSED CONCRETE FLOOR SLAB WITH TROWEL FINISH AND CLEAR HARDENER SEALER				

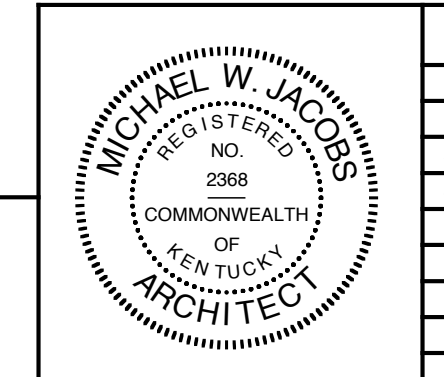

Omni Architects

APPROVED FOR PROGRAM CONCEPT ONLY

DATE